

Advanced Machine Learning Lecture 1

Introduction

20.10.2016

Bastian Leibe

Visual Computing Institute

RWTH Aachen University

<http://www.vision.rwth-aachen.de/>

leibe@vision.rwth-aachen.de

Organization

- **Lecturer**
 - Prof. Bastian Leibe (leibe@vision.rwth-aachen.de)
- **Teaching Assistants**
 - Umer Rafi (rafi@vision.rwth-aachen.de)
 - Lucas Beyer (beyer@vision.rwth-aachen.de)
- **Course webpage**
 - <http://www.vision.rwth-aachen.de/courses/>
 - Slides will be made available on the webpage
 - There is also an L2P electronic repository
- **Please subscribe to the lecture on the Campus system!**
 - Important to get email announcements and L2P access!

Language

- **Official course language will be English**
 - If at least one English-speaking student is present.
 - If not... you can choose.
- **However...**
 - Please tell me when I'm talking too fast or when I should repeat something in German for better understanding!
 - You may at any time ask questions in German!
 - You may turn in your exercises in German.
 - You may take the oral exam in German.

Relationship to Previous Courses

- Lecture *Machine Learning* (past summer semester)
 - Introduction to ML
 - Classification
 - Graphical models
- This course: *Advanced Machine Learning*
 - Natural continuation of ML course
 - Deeper look at the underlying concepts
 - But: will try to make it accessible also to newcomers
 - *Quick poll: Who hasn't heard the ML lecture?*
- This year: Lots of new material
 - Large lecture block on Deep Learning
 - Updated with some exciting new topics

Focus of This Lecture



Deep Learning

Organization

- **Structure: 3V (lecture) + 1Ü (exercises)**
 - 6 EECS credits
 - Part of the area “Applied Computer Science”
- **Place & Time**
 - Lecture/Exercises: Mon 14:15 - 15:45 room UMIC 025
 - Lecture/Exercises: Thu 14:15 - 15:45 room UMIC 025
- **Exam**
 - Oral or written exam, depending on number of participants
 - Towards the end of the semester, there will be a proposed date

Course Webpage

Course Schedule

Date	Title	Content	Material
Thu, 2016-10-20	Introduction	Introduction, Polynomial Fitting, Least-Squares Regression, Overfitting, Regularization, Ridge Regression	
Mon, 2016-10-24	Exercise 0	Intro Matlab	
Thu, 2016-10-27	Linear Regression I	Probabilistic View of Regression, Maximum Likelihood, MAP, Bayesian Curve Fitting	Monday: Matlab tutorial
Mon, 2016-10-31	Linear Regression II	Basis Functions, Sequential Learning, Multiple Outputs, Regularization, Lasso, Bias-Variance Decomposition	
Thu, 2016-11-03	Gaussian Processes I	Kernels, Kernel Ridge Regression, Gaussian Processes, Predictions with noisy observations	
Mon, 2016-11-07	Gaussian Processes II	Influence of hyperparameters, Bayesian Model Selection	
Thu, 2016-11-10	Probability Distributions	Bayesian Estimation Revisited, Conjugate Priors, Bernoulli, Binomial, Beta, Multinomial, Dirichlet, Gaussian, Gamma, Student's t	

<http://www.vision.rwth-aachen.de/courses/>

Exercises and Supplementary Material

- **Exercises**


- Typically 1 exercise sheet every 2 weeks.
- Pen & paper and programming exercises
 - Matlab for early topics
 - Theano for Deep Learning topics
- Hands-on experience with the algorithms from the lecture.
- Send your solutions the night before the exercise class.

- **Supplementary material**

- Research papers and book chapters
- Will be provided on the webpage.

Textbooks

- Many lecture topics will be covered in Bishop's book.
- Some additional topics can be found in Rasmussen & Williams.

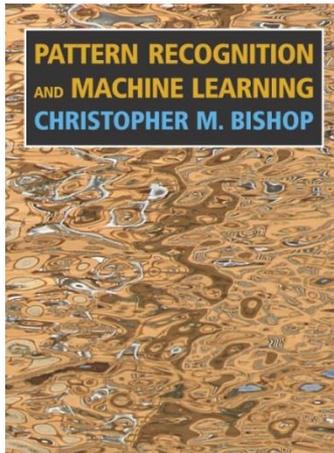


Christopher M. Bishop
Pattern Recognition and Machine Learning
Springer, 2006

(available in the library's "Handapparat")

Carl E. Rasmussen, Christopher K.I. Williams
Gaussian Processes for Machine Learning
MIT Press, 2006

(also available online: <http://www.gaussianprocess.org/gpml/>)

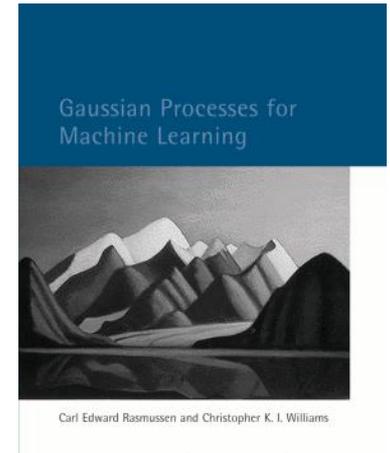

- Research papers will be given out for some topics.
 - Tutorials and deeper introductions.
 - Application papers

How to Find Us

- **Office:**
 - UMIC Research Centre
 - Mies-van-der-Rohe-Strasse 15, room 124



- **Office hours**
 - If you have questions to the lecture, come see us.
 - My regular office hours will be announced.
 - Send us an email before to confirm a time slot.

Questions are welcome!

Machine Learning

- **Statistical Machine Learning**
 - Principles, methods, and algorithms for learning and prediction on the basis of past evidence
- **Already everywhere**
 - Speech recognition (e.g. speed-dialing)
 - Computer vision (e.g. face detection)
 - Hand-written character recognition (e.g. letter delivery)
 - Information retrieval (e.g. image & video indexing)
 - Operation systems (e.g. caching)
 - Fraud detection (e.g. credit cards)
 - Text filtering (e.g. email spam filters)
 - Game playing (e.g. strategy prediction)
 - Robotics

What Is Machine Learning Useful For?



Siri. Beta

Your wish is
its command.



Automatic Speech Recognition

What Is Machine Learning Useful For?



Computer Vision
(Object Recognition, Segmentation, Scene Understanding)

What Is Machine Learning Useful For?

Google Search: Unsupervised Learning <http://www.google.com/search?q=Unsupervised+Learning&sourceid=fr...>

Web Images Groups News Froogle more »

Google | Unsupervised Learning Search | Advanced Search Preferences

Web Results 1 - 10 of about 150,000 for **Unsupervised Learning** (0.27 seconds)

[Mixture modelling, Clustering, Intrinsic classification ...](#)
Mixture Modelling page. Welcome to David Lowe's clustering, mixture modelling and **unsupervised learning** page. Mixture modelling for ...
www.cise.mcmaster.edu/~dld/mixture-modelling-page.html - 26k - 4 Oct 2004 - [Cached](#) - [Similar pages](#)

[ACI '99 Workshop - Unsupervised Learning in Natural Language ...](#)
PROGRAM: ACI '99 Workshop **Unsupervised Learning in Natural Language Processing**.
University of Maryland June 21, 1999. Endorsed by SIGLL ...
www.ai.sri.com/~kehler/unsup-aci-99.html - 5k - [Cached](#) - [Similar pages](#)

[Unsupervised learning and Clustering](#)
cgm.cs.mcgill.ca/~sos9/cse644/projects/wjhw/ - 1k - [Cached](#) - [Similar pages](#)

[NIPS'98 Workshop - Integrating Supervised and Unsupervised ...](#)
NIPS'98 Workshop: Integrating Supervised and **Unsupervised Learning** Friday, December 4, 1998 ... 4:45-5:30, Theories of **Unsupervised Learning** and Missing Values ...
www-2.cs.cmu.edu/~mccallum/supunsup/ - 7k - [Cached](#) - [Similar pages](#)

[NIPS Tutorial 1999](#)
Probabilistic Models for **Unsupervised Learning** Tutorial presented at the 1999 NIPS Conference by Zoubin Ghahramani and Sam Roweis ...
www.gatsby.ucl.ac.uk/~zoubin/NIPStutorial.html - 4k - [Cached](#) - [Similar pages](#)

[Gatsby Course: Unsupervised Learning - Homepage](#)
Unsupervised Learning (Fall 2000). -- Syllabus (resources page): 10/10 1 -
Introduction to **Unsupervised Learning** Geoff project: (ps, pdf) ...
www.gatsby.ucl.ac.uk/~geoff/course/ - 5k - [Cached](#) - [Similar pages](#)
[More results from www.gatsby.ucl.ac.uk/]

[ppp: Unsupervised Learning of the Morphology of a Natural Language](#)
File Format: PDF/Adobe Acrobat - www.as.itm.it/
Page 1, Page 2, Page 3, Page 4, Page 5, Page 6, Page 7, Page 8, Page 9, Page 10, Page 11, Page 12, Page 13, Page 14, Page 15, Page 16, Page 17, Page 18, Page 19 ...
ac.fcc.upenn.edu/ul/1991-2001.pdf - [Similar pages](#)

[Unsupervised Learning - The MIT Press](#)
From Bradford books: **Unsupervised Learning** Foundations of Neural Computation Edited by Geoffrey Hinton and Terrence J. Sejnowski Since its founding in 1989 by ...
mitpress.mit.edu/book-home.tcl?isbn=026258160X - 13k - [Cached](#) - [Similar pages](#)

[psj: Unsupervised Learning of Disambiguation Rules for Part of](#)
File Format: Adobe PostScript - www.as.lexi
Unsupervised Learning of Disambiguation Rules for Part of Speech Tagging. Eric Brill, 1 - ... It is possible to use **unsupervised learning** to train stochastic ...
www.cs.jhu.edu/~brill/ac-wkshp.ps - [Similar pages](#)

[The Unsupervised Learning Group \(ULG\) at UT Austin](#)
the **Unsupervised Learning Group (ULG)**. What? the **Unsupervised Learning Group (ULG)** is a group of graduate students from the Computer ...
www.lans.ece.utexas.edu/ulg/ - 14k - [Cached](#) - [Similar pages](#)

Go oooooo oooooo g l e

Result Page: 1 2 3 4 5 6 7 8 9 10 Next

1 of 2 06/10/04 15:44


Information Retrieval
(Retrieval, Categorization, Clustering, ...)

What Is Machine Learning Useful For?





**Financial Prediction
(Time series analysis, ...)**

What Is Machine Learning Useful For?

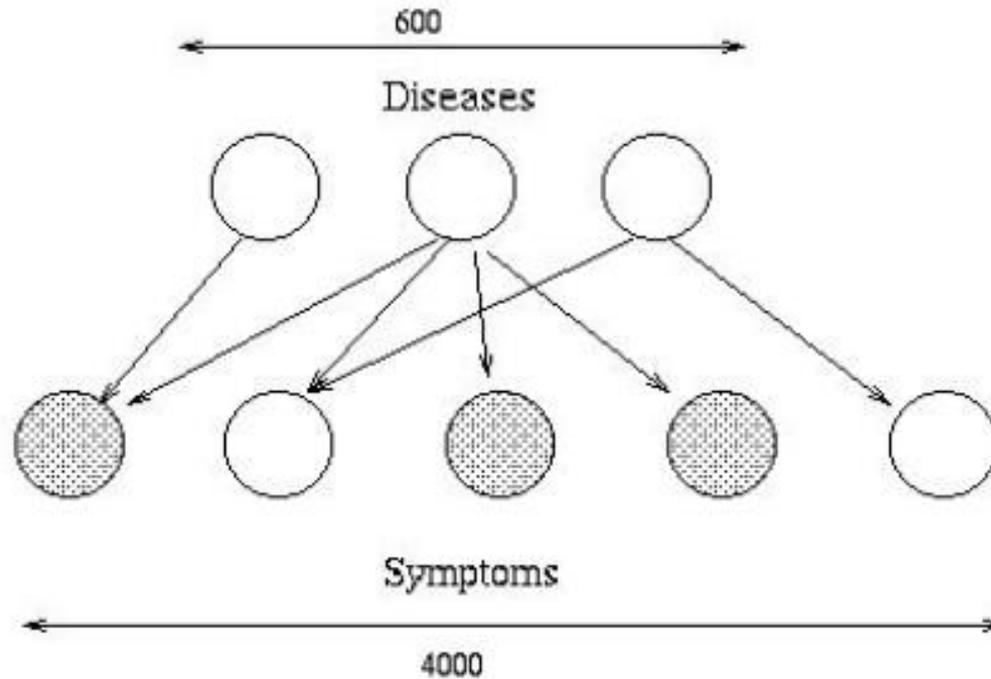


Medical Diagnosis
(Inference from partial observations)

What Is Machine Learning Useful For?

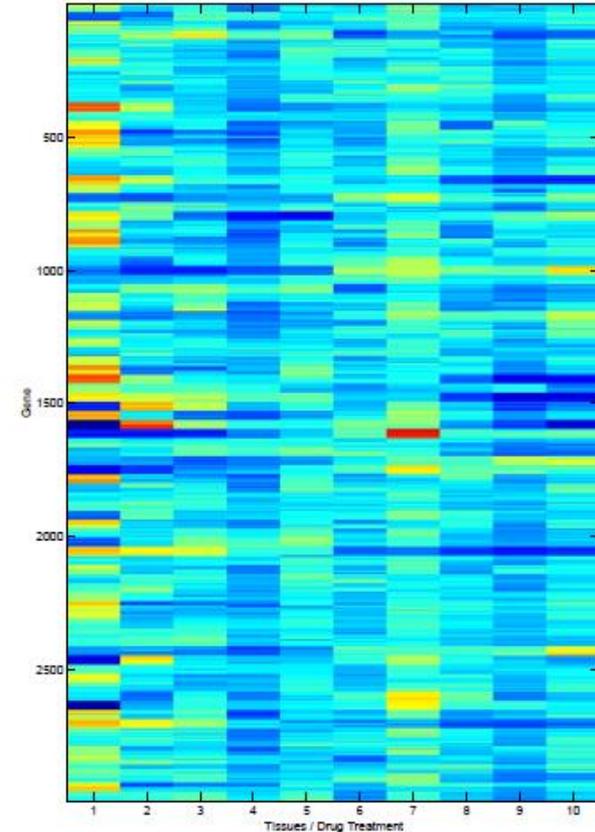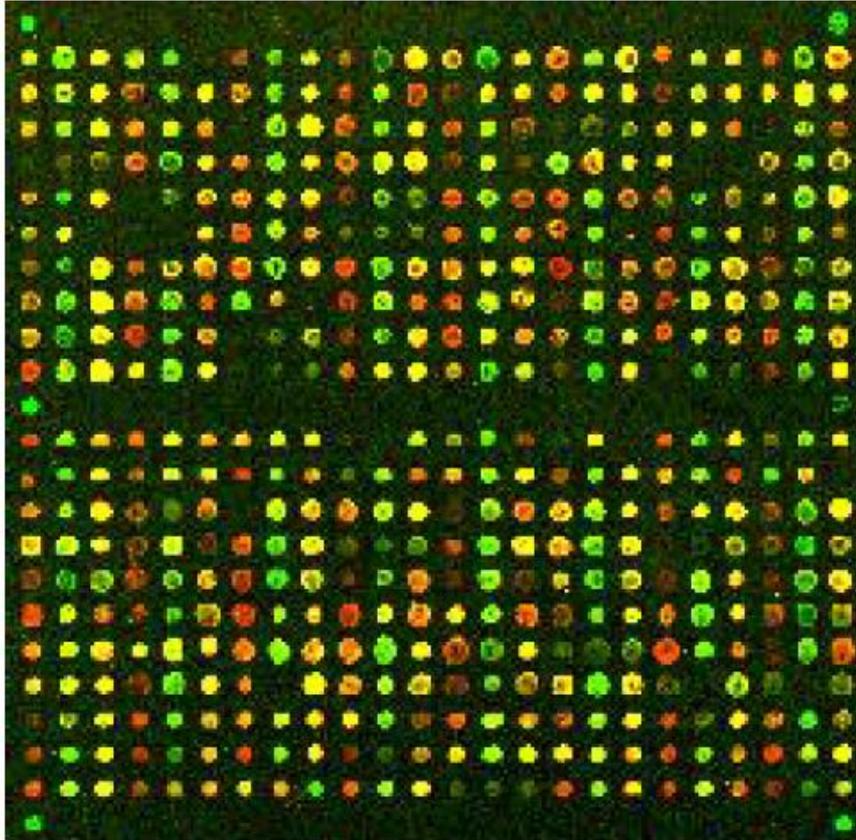

Bioinformatics
(Modelling gene microarray data,...)

What Is Machine Learning Useful For?

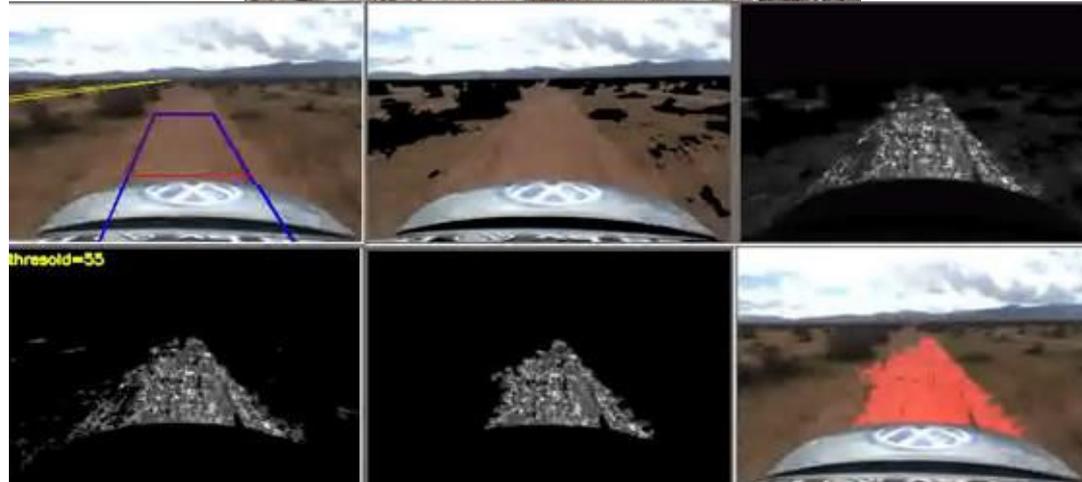

Robotics
(DARPA Grand Challenge,...)

Machine Learning: Core Questions


- *Learning to perform a task from experience*
- **Task**
 - Can often be expressed through a mathematical function

$$y = f(x; w)$$

- x : Input
- y : Output
- w : Parameters (this is what is “learned”)
- **Classification vs. Regression**
 - Regression: continuous y
 - Classification: discrete y
 - E.g. class membership, sometimes also posterior probability

Machine Learning: Core Questions



- $y = f(x; w)$
 - w : characterizes the family of functions
 - w : indexes the space of hypotheses
 - w : vector, connection matrix, graph, ...

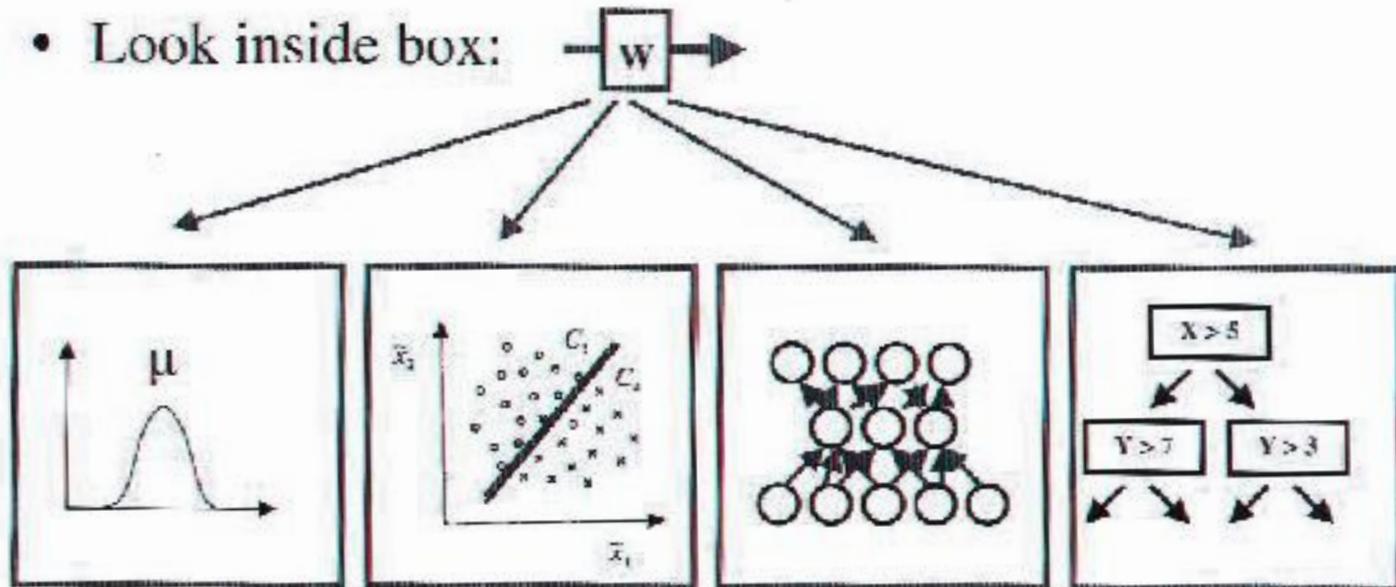

A Look Back: Lecture *Machine Learning*

• Fundamentals



- Bayes Decision Theory
- Probability Density Estimation

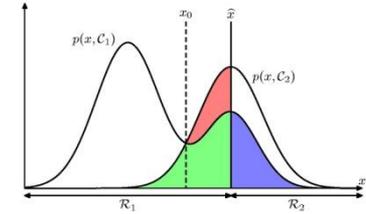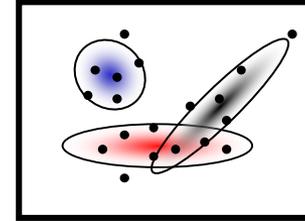

• Classification Approaches



- Linear Discriminant Functions
- Support Vector Machines
- Ensemble Methods & Boosting
- Randomized Trees, Forests & Ferns

$$f : \mathcal{X} \rightarrow \{0, 1\}$$

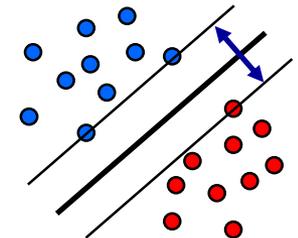

• Generative Models

- Bayesian Networks
- Markov Random Fields

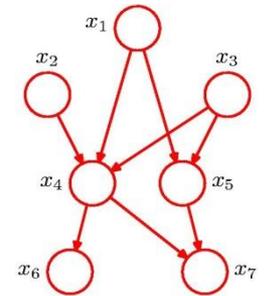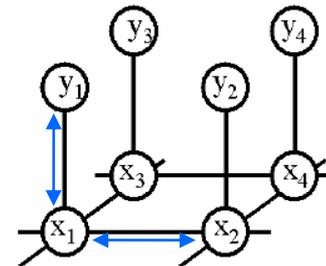


This Lecture: *Advanced Machine Learning*

Extending lecture *Machine Learning* from last semester...

- Regression Approaches


- Linear Regression
- Regularization (Ridge, Lasso)
- Gaussian Processes

$$f : \mathcal{X} \rightarrow \mathbb{R}$$

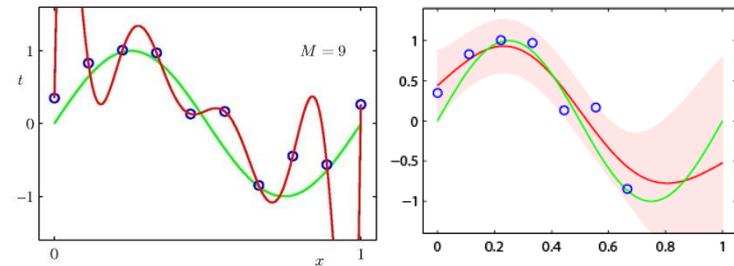


- Learning with Latent Variables

- EM and Generalizations
- Approximate Inference

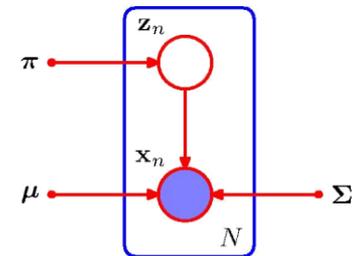

- Deep Learning

- Neural Networks
- CNNs, RNNs, etc.

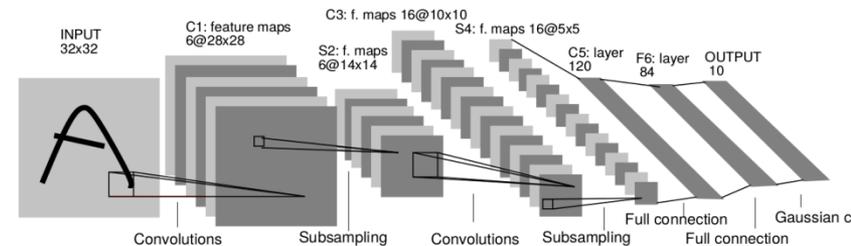

Let's Get Started...

- Some of you already have basic ML background
 - *Who hasn't?*
- We'll start with a gentle introduction
 - I'll try to make the lecture also accessible to newcomers
 - We'll review the main concepts before applying them
 - I'll point out chapters to review from ML lecture whenever knowledge from there is needed/helpful
 - But please tell me when I'm moving too fast (or too slow)

Topics of This Lecture


- **Regression: Motivation**
 - Polynomial fitting
 - General Least-Squares Regression
 - Overfitting problem
 - Regularization
 - Ridge Regression
- **Recap: Important Concepts from ML Lecture**
 - Probability Theory
 - Bayes Decision Theory
 - Maximum Likelihood Estimation
 - Bayesian Estimation
- **A Probabilistic View on Regression**
 - Least-Squares Estimation as Maximum Likelihood

Regression

- Learning to predict a continuous function value
 - Given: training set $\mathbf{X} = \{x_1, \dots, x_N\}$
with target values $\mathbf{T} = \{t_1, \dots, t_N\}$.
 - ⇒ Learn a continuous function $y(x)$ to predict the function value for a new input x .
- Steps towards a solution
 - Choose a form of the function $y(x, \mathbf{w})$ with parameters \mathbf{w} .
 - Define an error function $E(\mathbf{w})$ to optimize.
 - Optimize $E(\mathbf{w})$ for \mathbf{w} to find a good solution.
(This may involve math).
 - Derive the properties of this solution and think about its limitations.

Example: Polynomial Curve Fitting

- Toy dataset
 - Generated by function
$$f(x) = \sin(2\pi x) + \epsilon$$
 - Small level of random noise with Gaussian distribution added (blue dots)

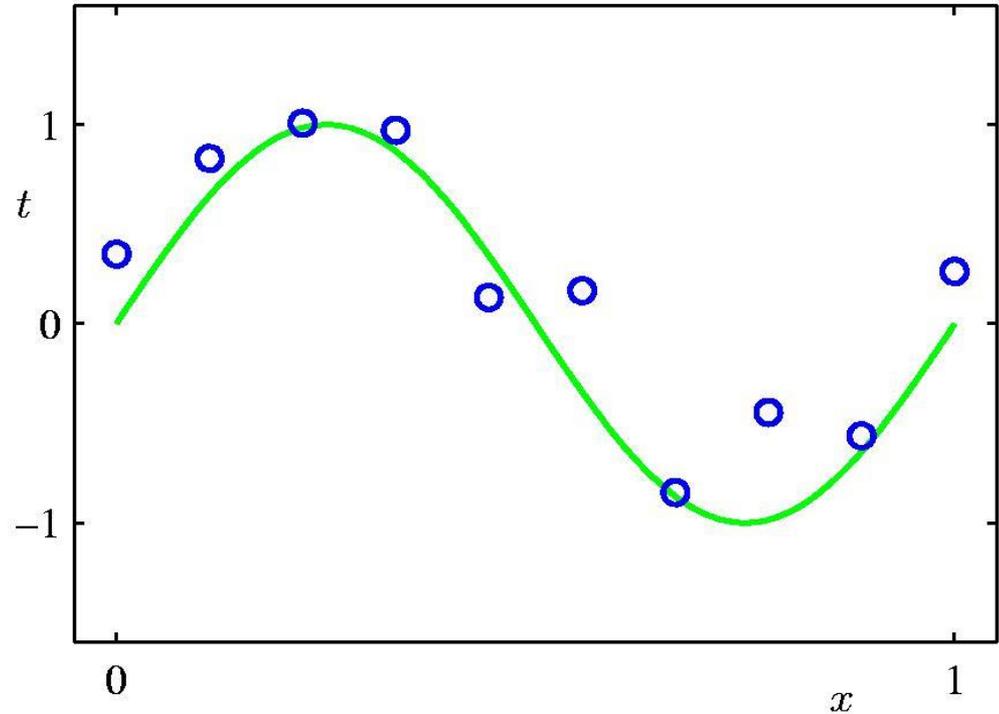


- Goal: fit a polynomial function to this data

$$y(x, \mathbf{w}) = w_0 + w_1x + w_2x^2 + \dots + w_Mx^M = \sum_{j=0}^M w_jx^j$$

- Note: Nonlinear function of x , but linear function of the w_j .

Error Function

- How to determine the values of the coefficients \mathbf{w} ?
 - We need to define an **error function** to be minimized.
 - This function specifies how a deviation from the target value should be weighted.
- Popular choice: sum-of-squares error
 - Definition
$$E(\mathbf{w}) = \frac{1}{2} \sum_{n=1}^N \{y(x_n, \mathbf{w}) - t_n\}^2$$
 - We'll discuss the motivation for this particular function later...

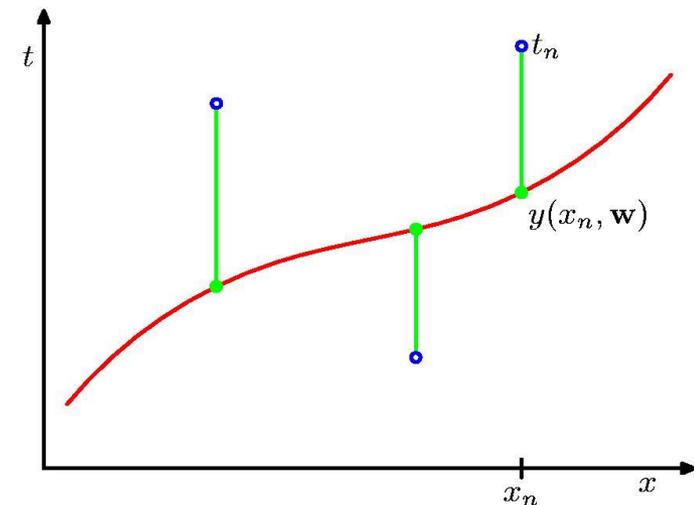

Minimizing the Error

- How do we minimize the error?

$$E(\mathbf{w}) = \frac{1}{2} \sum_{n=1}^N \{y(x_n, \mathbf{w}) - t_n\}^2$$

- Solution (Always!)

- Compute the derivative and set it to zero.

$$\frac{\partial E(\mathbf{w})}{\partial w_j} = \sum_{n=1}^N \{y(x_n, \mathbf{w}) - t_n\} \frac{\partial y(x_n, \mathbf{w})}{\partial w_j} \stackrel{!}{=} 0$$

- Since the error is a quadratic function of \mathbf{w} , its derivative will be linear in \mathbf{w} .

⇒ Minimization has a unique solution.

Least-Squares Regression

- We have given

- Training data points:

$$X = \{\mathbf{x}_1 \in \mathbb{R}^d, \dots, \mathbf{x}_n\}$$

- Associated function values:

$$T = \{t_1 \in \mathbb{R}, \dots, t_n\}$$

- Start with **linear regressor**:

- Try to enforce $\mathbf{x}_i^T \mathbf{w} + w_0 = t_i, \quad \forall i = 1, \dots, n$

- One linear equation for each training data point / label pair.

- **This is the same basic setup used for least-squares classification!**
 - Only the values are now continuous.

Least-Squares Regression

$$\mathbf{x}_i^T \mathbf{w} + w_0 = t_i, \quad \forall i = 1, \dots, n$$

- **Setup**

- **Step 1: Define** $\tilde{\mathbf{x}}_i = \begin{pmatrix} \mathbf{x}_i \\ 1 \end{pmatrix}, \quad \tilde{\mathbf{w}} = \begin{pmatrix} \mathbf{w} \\ w_0 \end{pmatrix}$

- **Step 2: Rewrite** $\tilde{\mathbf{x}}_i^T \tilde{\mathbf{w}} = t_i, \quad \forall i = 1, \dots, n$

- **Step 3: Matrix-vector notation**

$$\tilde{\mathbf{X}}^T \tilde{\mathbf{w}} = \mathbf{t} \quad \text{with} \quad \tilde{\mathbf{X}} = [\tilde{\mathbf{x}}_1, \dots, \tilde{\mathbf{x}}_n]$$

$$\mathbf{t} = [t_1, \dots, t_n]^T$$

- **Step 4: Find least-squares solution**

$$\|\tilde{\mathbf{X}}^T \tilde{\mathbf{w}} - \mathbf{t}\|^2 \rightarrow \min$$

- **Solution:** $\tilde{\mathbf{w}} = (\tilde{\mathbf{X}}\tilde{\mathbf{X}}^T)^{-1}\tilde{\mathbf{X}}\mathbf{t}$

Regression with Polynomials

- How can we fit arbitrary polynomials using least-squares regression?
 - We introduce a feature transformation (as before in ML).

$$y(\mathbf{x}) = \mathbf{w}^T \phi(\mathbf{x})$$

$$= \sum_{i=0}^M w_i \phi_i(\mathbf{x})$$





assume

$$\phi_0(\mathbf{x}) = 1$$

basis functions

- **E.g.:** $\phi(\mathbf{x}) = (1, x, x^2, x^3)^T$
- **Fitting a cubic polynomial.**

Varying the Order of the Polynomial.

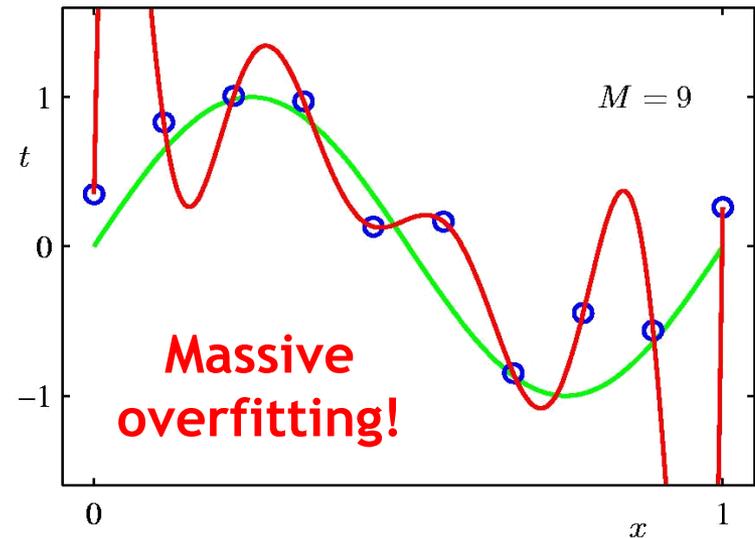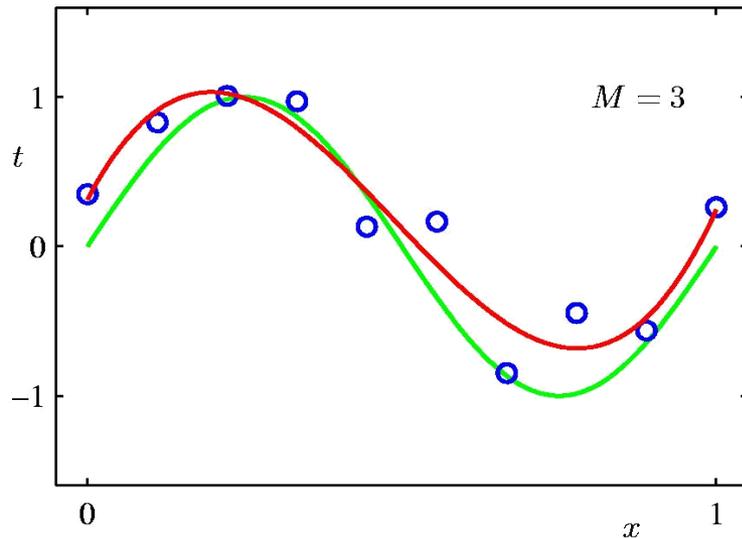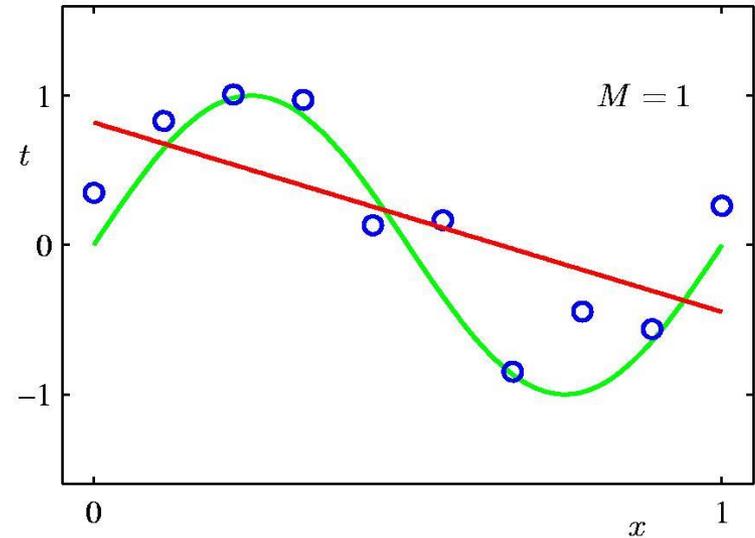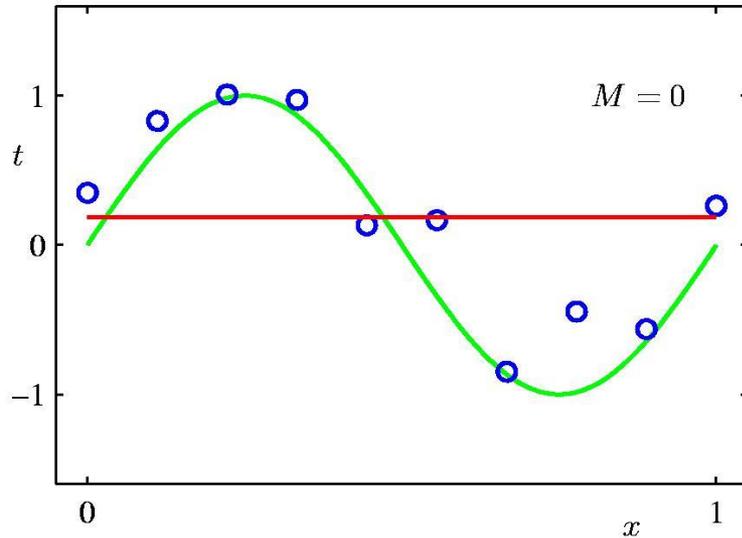

Which one should we pick?



Analysis of the Results

- Results for different values of M

- Best representation of the original function $\sin(2\pi x)$ with $M = 3$.
- Perfect fit to the training data with $M = 9$, but poor representation of the original function.

- Why is that???

- After all, $M = 9$ contains $M = 3$ as a special case!

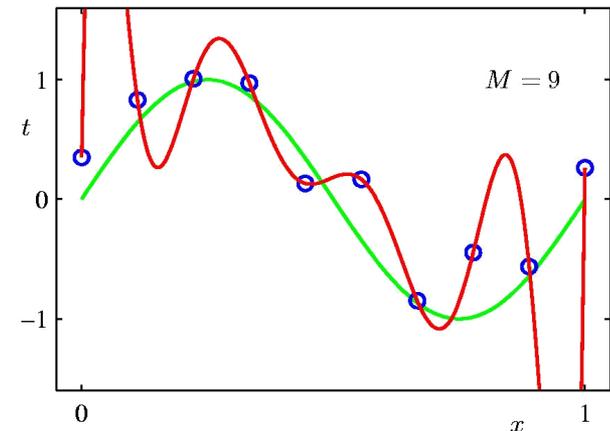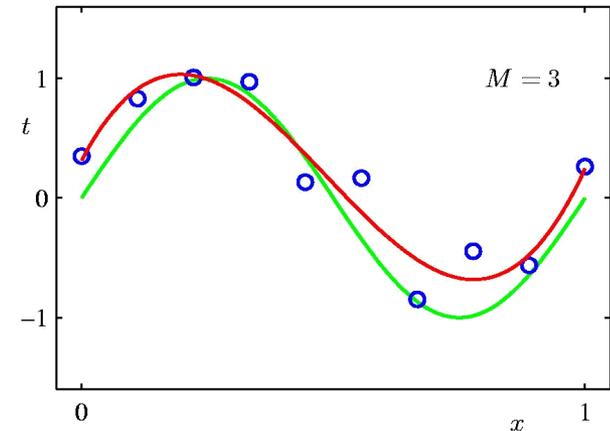

Overfitting

- Problem

- Training data contains some noise


$$f(x) = \sin(2\pi x) + \epsilon$$

- Higher-order polynomial fitted perfectly to the noise.
- We say it was **overfitting to the training data**.

- Goal is a good prediction of future data

- Our target function should fit well to the training data, but also generalize.
- Measure generalization performance on independent test set.


Measuring Generalization

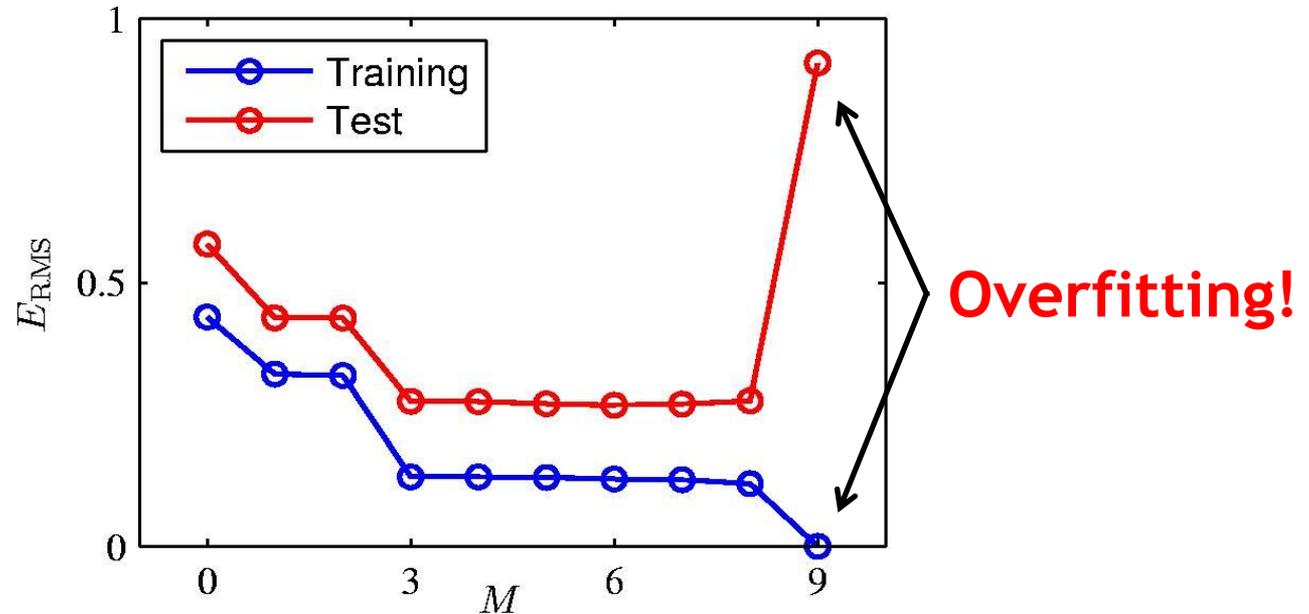


- E.g., Root Mean Square Error (RMS): $E_{RMS} = \sqrt{2E(\mathbf{w}^*)/N}$
- Motivation
 - Division by N lets us compare different data set sizes.
 - Square root ensures E_{RMS} is measured on the same scale (and in the same units) as the target variable t .

Analyzing Overfitting

- Example: Polynomial of degree 9

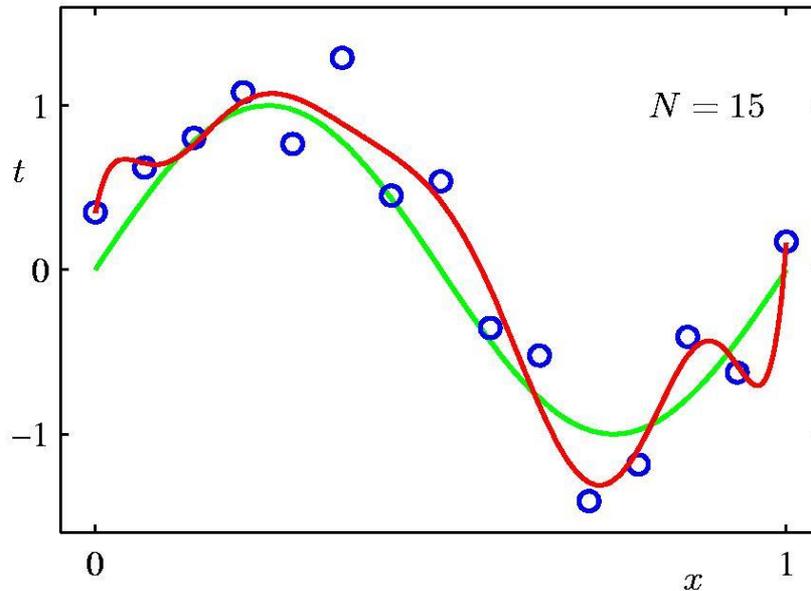

Relatively little data
Overfitting typical

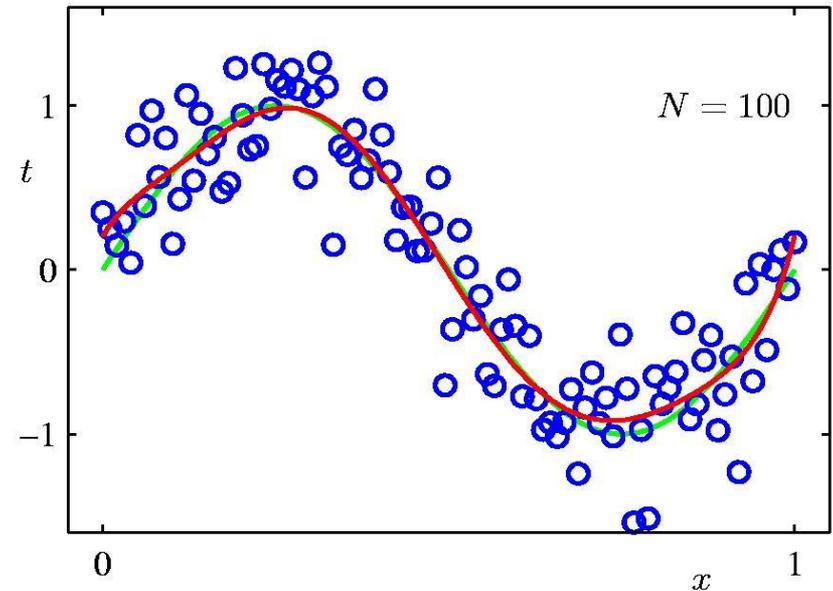


Enough data
Good estimate

⇒ Overfitting becomes less of a problem with more data.

What Is Happening Here?

- The coefficients get very large:
 - Fitting the data from before with various polynomials.
 - Coefficients:

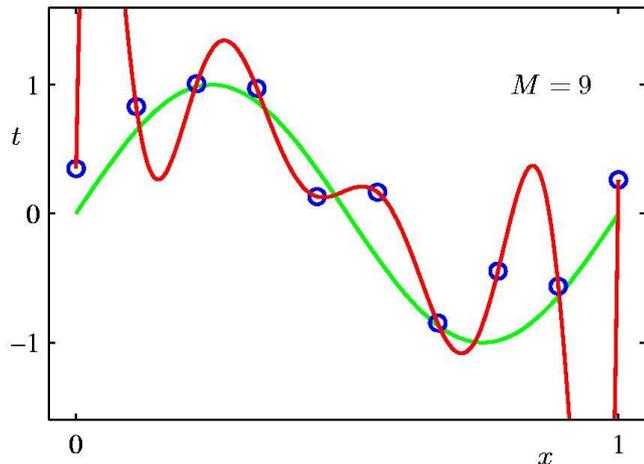

	$M = 0$	$M = 1$	$M = 3$	$M = 9$
w_0^*	0.19	0.82	0.31	0.35
w_1^*		-1.27	7.99	232.37
w_2^*			-25.43	-5321.83
w_3^*			17.37	48568.31
w_4^*				-231639.30
w_5^*				640042.26
w_6^*				-1061800.52
w_7^*				1042400.18
w_8^*				-557682.99
w_9^*				125201.43

Regularization

- What can we do then?
 - How can we apply the approach to data sets of limited size?
 - We still want to use relatively complex and flexible models.

- Workaround: Regularization

- Penalize large coefficient values




$$\tilde{E}(\mathbf{w}) = \frac{1}{2} \sum_{n=1}^N \{y(x_n, \mathbf{w}) - t_n\}^2 + \frac{\lambda}{2} \|\mathbf{w}\|^2$$

- Here we've simply added a **quadratic regularizer**, which is simple to optimize

$$\|\mathbf{w}\|^2 = \mathbf{w}^T \mathbf{w} = \cancel{w_0^2} + w_1^2 + \dots + w_M^2$$


- The resulting form of the problem is called **Ridge Regression**.
- (*Note:* w_0 is often omitted from the regularizer.)

Results with Regularization ($M=9$)

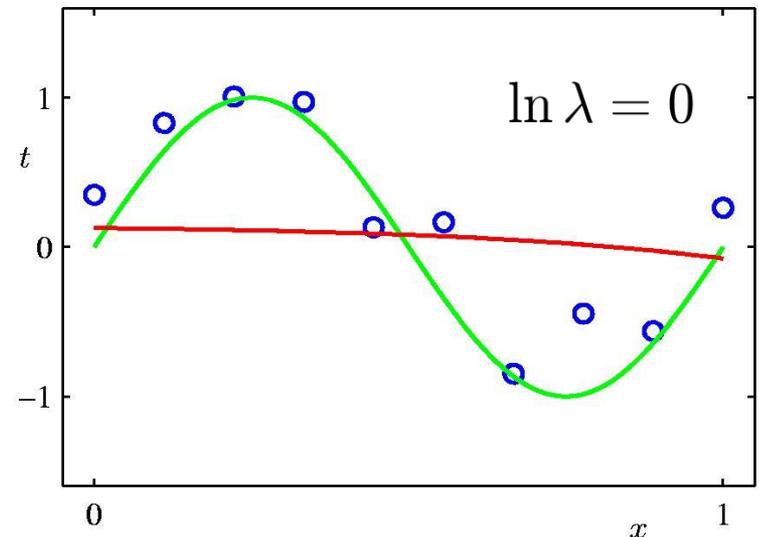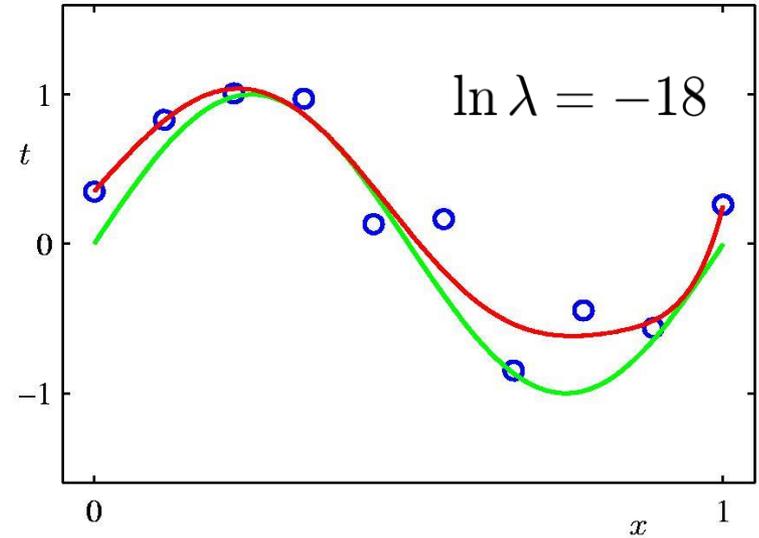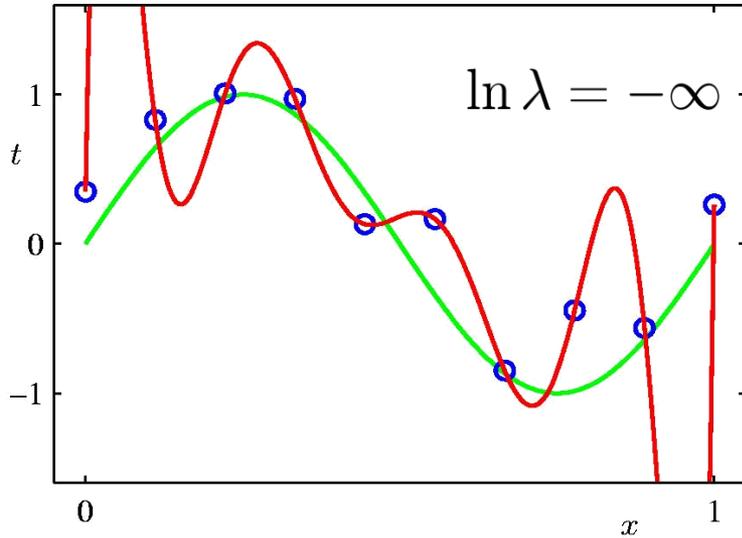

	$\ln \lambda = -\infty$	$\ln \lambda = -18$	$\ln \lambda = 0$
w_0^*	0.35	0.35	0.13
w_1^*	232.37	4.74	-0.05
w_2^*	-5321.83	-0.77	-0.06
w_3^*	48568.31	-31.97	-0.05
w_4^*	-231639.30	-3.89	-0.03
w_5^*	640042.26	55.28	-0.02
w_6^*	-1061800.52	41.32	-0.01
w_7^*	1042400.18	-45.95	-0.00
w_8^*	-557682.99	-91.53	0.00
w_9^*	125201.43	72.68	0.01

RMS Error for Regularized Case

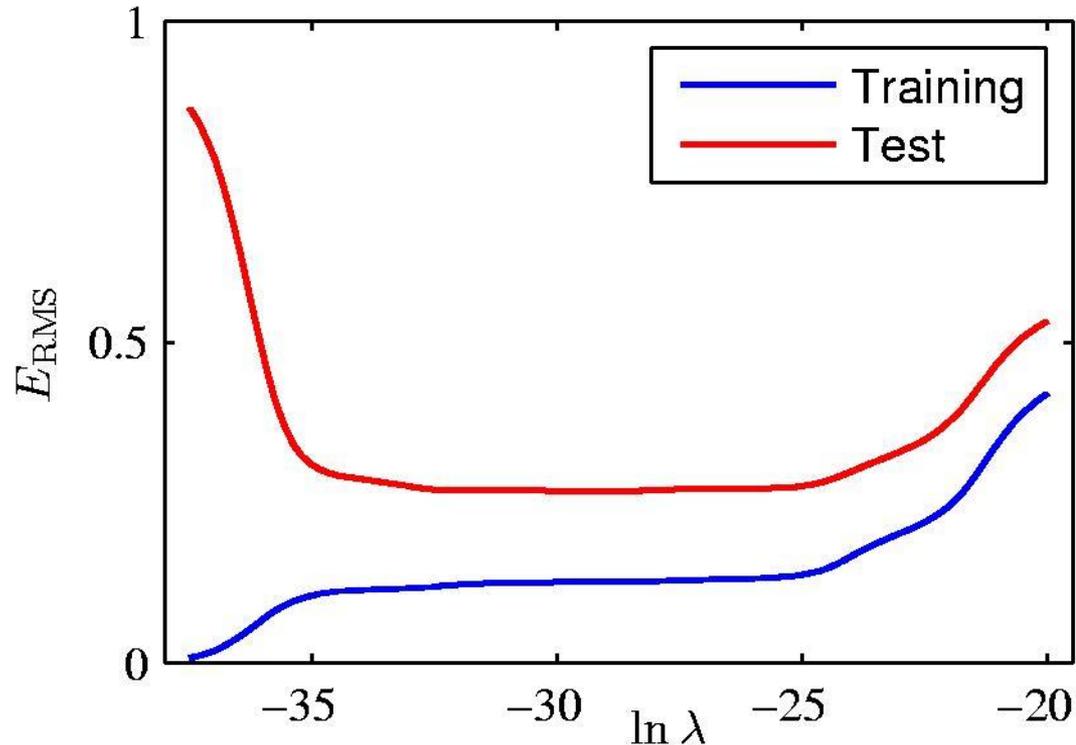

- **Effect of regularization**

- The trade-off parameter λ now controls the effective model complexity and thus the degree of overfitting.

Summary

- We've seen several important concepts
 - Linear regression
 - Overfitting
 - Role of the amount of data
 - Role of model complexity
 - Regularization
- How can we approach this more systematically?
 - Would like to work with complex models.
 - How can we prevent overfitting systematically?
 - How can we avoid the need for validation on separate test data?
 - What does it *mean* to do linear regression?
 - What does it *mean* to do regularization?

Topics of This Lecture

- Regression: Motivation
 - Polynomial fitting
 - General Least-Squares Regression
 - Overfitting problem
 - Regularization
 - Ridge Regression
- **Recap: Important Concepts from ML Lecture**
 - **Probability Theory**
 - **Bayes Decision Theory**
 - **Maximum Likelihood Estimation**
 - **Bayesian Estimation**
- A Probabilistic View on Regression
 - Least-Squares Estimation as Maximum Likelihood

Recap: The Rules of Probability

- Basic rules

Sum Rule
$$p(X) = \sum_Y p(X, Y)$$


Product Rule
$$p(X, Y) = p(Y|X)p(X)$$

- From those, we can derive


Bayes' Theorem
$$p(Y|X) = \frac{p(X|Y)p(Y)}{p(X)}$$

where
$$p(X) = \sum_Y p(X|Y)p(Y)$$

Recap: Bayes Decision Theory

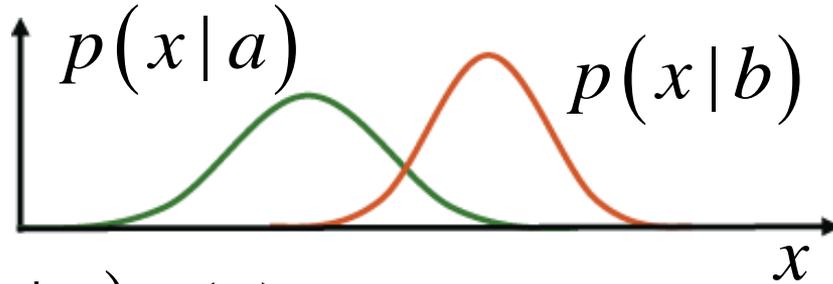


Likelihood

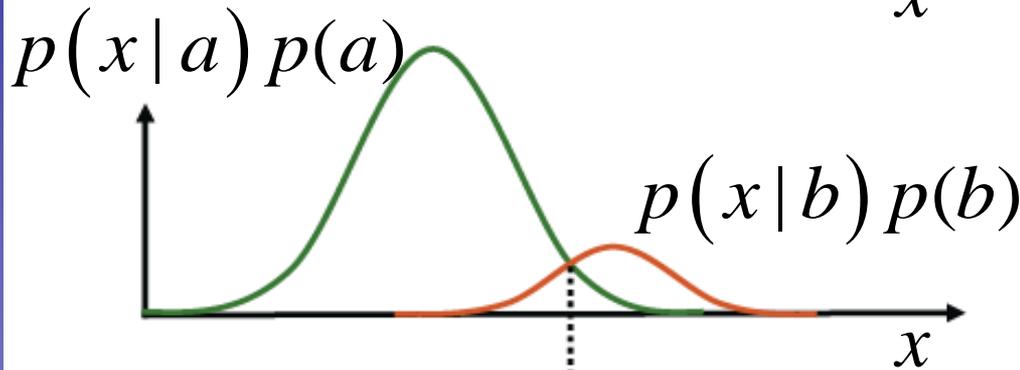

Likelihood \times Prior

Decision boundary

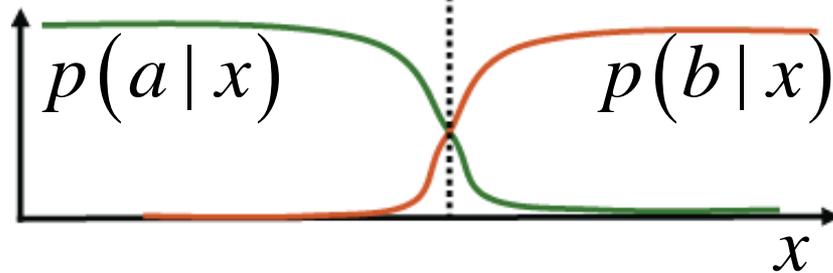


$$\text{Posterior} = \frac{\text{Likelihood} \times \text{Prior}}{\text{NormalizationFactor}}$$

Recap: Gaussian (or Normal) Distribution

- One-dimensional case

- Mean μ
- Variance σ^2


$$\mathcal{N}(x|\mu, \sigma^2) = \frac{1}{\sqrt{2\pi\sigma}} \exp \left\{ -\frac{(x - \mu)^2}{2\sigma^2} \right\}$$

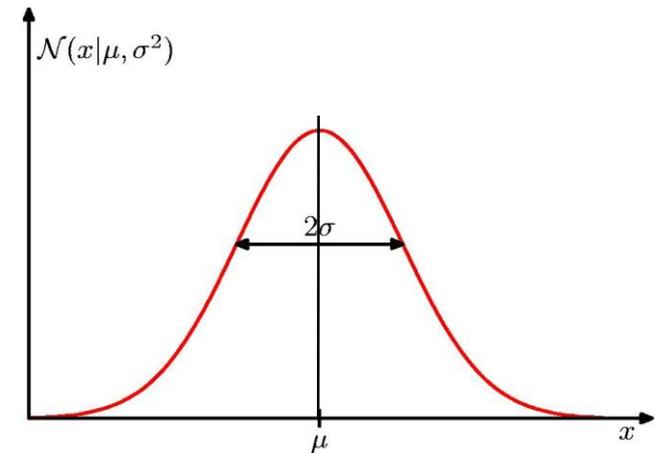

- Multi-dimensional case

- Mean μ
- Covariance Σ

$$\mathcal{N}(\mathbf{x}|\mu, \Sigma) = \frac{1}{(2\pi)^{D/2} |\Sigma|^{1/2}} \exp \left\{ -\frac{1}{2} (\mathbf{x} - \mu)^T \Sigma^{-1} (\mathbf{x} - \mu) \right\}$$

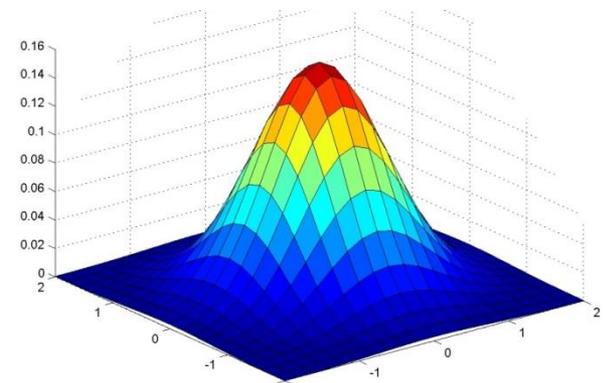

Side Note

- **Notation**

- In many situations, it will be necessary to work with the inverse of the **covariance matrix** Σ :

$$\Lambda = \Sigma^{-1}$$

- We call Λ the **precision matrix**.
- We can therefore also write the Gaussian as


$$\mathcal{N}(x|\mu, \lambda^{-1}) = \frac{1}{\sqrt{2\pi}\lambda^{-1/2}} \exp \left\{ -\frac{\lambda}{2}(x - \mu)^2 \right\}$$

$$\mathcal{N}(\mathbf{x}|\boldsymbol{\mu}, \boldsymbol{\Lambda}^{-1}) = \frac{1}{(2\pi)^{D/2}|\boldsymbol{\Lambda}|^{-1/2}} \exp \left\{ -\frac{1}{2}(\mathbf{x} - \boldsymbol{\mu})^T \boldsymbol{\Lambda}(\mathbf{x} - \boldsymbol{\mu}) \right\}$$

Recap: Parametric Methods

- **Given**

- Data $X = \{x_1, x_2, \dots, x_N\}$
- Parametric form of the distribution with parameters θ
- E.g. for Gaussian distrib.: $\theta = (\mu, \sigma)$

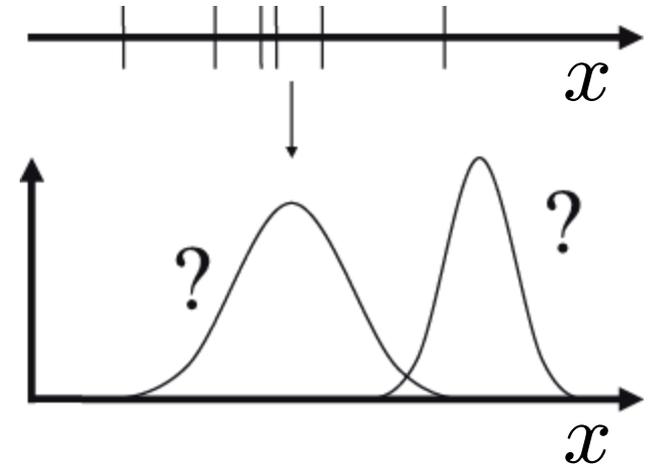

- **Learning**

- Estimation of the parameters θ

- **Likelihood of θ**

- Probability that the data X have indeed been generated from a probability density with parameters θ

$$L(\theta) = p(X|\theta)$$

Recap: Maximum Likelihood Approach

- **Computation of the likelihood**

- Single data point: $p(x_n|\theta)$
- Assumption: all data points $X = \{x_1, \dots, x_n\}$ are independent

$$L(\theta) = p(X|\theta) = \prod_{n=1}^N p(x_n|\theta)$$

- **Log-likelihood**

$$E(\theta) = -\ln L(\theta) = -\sum_{n=1}^N \ln p(x_n|\theta)$$

- **Estimation of the parameters θ (Learning)**

- Maximize the likelihood (=minimize the negative log-likelihood)
⇒ Take the derivative and set it to zero.


$$\frac{\partial}{\partial \theta} E(\theta) = -\sum_{n=1}^N \frac{\frac{\partial}{\partial \theta} p(x_n|\theta)}{p(x_n|\theta)} \stackrel{!}{=} 0$$

Recap: Maximum Likelihood - Limitations

- Maximum Likelihood has several significant limitations
 - It systematically underestimates the variance of the distribution!
 - E.g. consider the case

$$N = 1, X = \{x_1\}$$

⇒ Maximum-likelihood estimate:

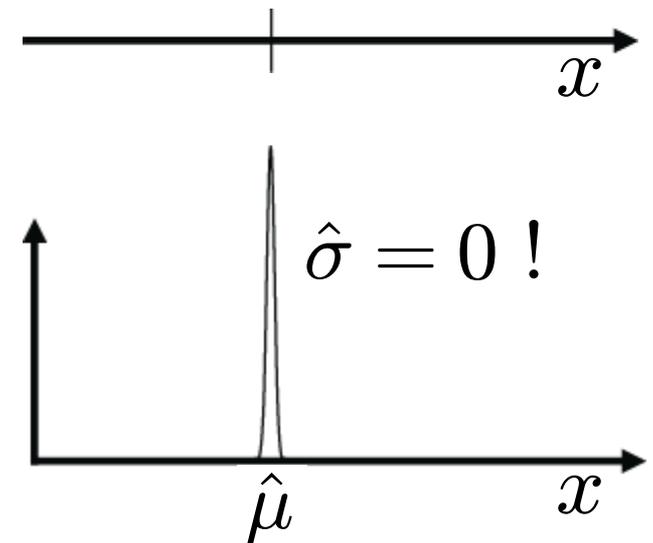

- We say *ML overfits to the observed data*.
- We will still often use ML, but it is important to know about this effect.

Recap: Deeper Reason

- **Maximum Likelihood** is a **Frequentist** concept
 - In the **Frequentist view**, probabilities are the frequencies of random, repeatable events.
 - These frequencies are fixed, but can be estimated more precisely when more data is available.
- This is in contrast to the **Bayesian** interpretation
 - In the **Bayesian view**, probabilities quantify the uncertainty about certain states or events.
 - This uncertainty can be revised in the light of new evidence.
- **Bayesians and Frequentists do not like each other too well...**



Recap: Bayesian Learning Approach

- Bayesian view:

- Consider the parameter vector θ as a random variable.
- When estimating the parameters, what we compute is

$$p(x|X) = \int p(x, \theta|X) d\theta$$

Assumption: given θ , this doesn't depend on X anymore

$$p(x, \theta|X) = p(x|\theta, \cancel{X})p(\theta|X)$$

$$p(x|X) = \int \underbrace{p(x|\theta)} p(\theta|X) d\theta$$

This is entirely determined by the parameter θ (i.e. by the parametric form of the pdf).

Recap: Bayesian Learning Approach

- Discussion

Likelihood of the parametric form θ given the data set X .

Estimate for x based on parametric form θ

Prior for the parameters θ

$$p(x|X) = \int \frac{p(x|\theta)L(\theta)p(\theta)}{\int L(\theta)p(\theta)d\theta} d\theta$$

Normalization: integrate over all possible values of θ

- The more uncertain we are about θ , the more we average over all possible parameter values.

Topics of This Lecture

- Regression: Motivation
 - Polynomial fitting
 - General Least-Squares Regression
 - Overfitting problem
 - Regularization
 - Ridge Regression
- Recap: Important Concepts from ML Lecture
 - Probability Theory
 - Bayes Decision Theory
 - Maximum Likelihood Estimation
 - Bayesian Estimation
- **A Probabilistic View on Regression**
 - **Least-Squares Estimation as Maximum Likelihood**

Next lecture...

References and Further Reading

- More information, including a short review of Probability theory and a good introduction in Bayes Decision Theory can be found in Chapters 1.1, 1.2 and 1.5 of

Christopher M. Bishop
Pattern Recognition and Machine Learning
Springer, 2006

